

Hybriseal® Façade

How to order

Hybriseal® Façade is available in 310 ml cartridges and 600 ml sausages packed per 12 in a box. To order your specific Hybriseal® Façade, please find below the article and EAN codes:

310 ml cartridge

| Colour: | Article code: | EAN code: |
|---------------|---------------|---------------|
| White | 12002233 | 8711595167550 |
| Concrete Grey | 12001680 | 8711595163248 |

600 ml sausages

| Colour: | Article code: | EAN code: |
|---------------|---------------|---------------|
| White | 12001667 | 8711595163101 |
| RAL 1013 | 12003791 | 8711595163101 |
| Light Beige | 12001666 | 8711595163088 |
| Dark Beige | 12001665 | 8711595163064 |
| Dark Brown | 12003705 | 8711595176774 |
| RAL 7030 | 12001668 | 8711595163125 |
| Concrete Grey | 12001669 | 8711595163149 |
| Middle Grey | 12001670 | 8711595163163 |
| Dark Grey | 12001671 | 8711595163187 |
| Basalt | 12001672 | 8711595163200 |
| Black | 12001673 | 8711595163224 |



Centre of Excellence

Better results through Knowledge

Den Braven 's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!



Den Braven



Hybriseal® Façade

Versatile one component sealant for facade joints

denbraven.com

BETTER RESULTS THROUGH KNOWLEDGE

Hybriseal® Façade

Versatile one component
sealant for façade joints

- Special formulation for façade joints
- Certified also for pedestrian walkways according EN 15651-4
- Bubble free
- No shrinkage
- Free of isocyanates and silicones
- Low modulus and highly elastic
- Good resistant to UV, water and weather




Hybriseal® Façade

Product Descriptions

Hybriseal® Façade is a versatile one component hybrid based sealant with a low modulus for sealing building joints.

Applications

Hybriseal® Façade is used for expansion and connection joint sealing to precast concrete, brickwork and masonry, perimeter pointing and wall sealing. In general Hybriseal® Façade has a good adhesion, also without primer, to concrete, brickwork, painted wood, glass, glazed substrates, aluminium, steel, stainless steel, plastics like polyester and most uPVC.

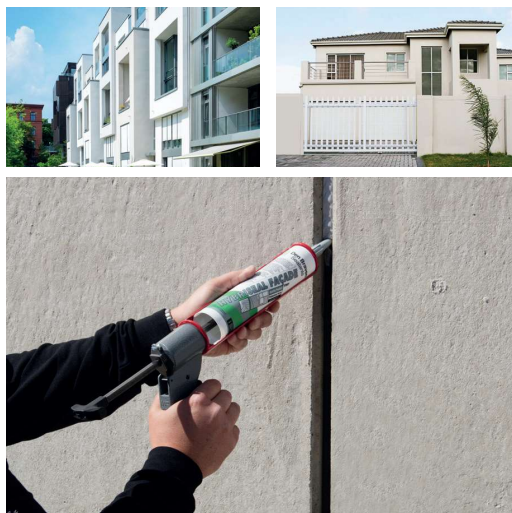

Hybriseal® Façade

Certifications

EN 15651-1: F-EXT-INT-CC 25LM
EN 15651-4: PW-EXT-INT-CC 25LM
SNJF F25A

Technical Performances

| | |
|---------------------|------------|
| Density | 1,35 g/ml |
| Shore-A hardness | 25° |
| Elongation at break | 350% |
| Tensile strength | 0,50 Mpa |
| Skin formation | 90 minutes |
| Curing time | 2,5 mm/day |

Visit our website to download the full technical specifications of the Hybriseal® Façade.



Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the USP movie of the original Hybriseal® Façade:



BETTER RESULTS THROUGH KNOWLEDGE

denbraven.com